



PEAK-Drivers 4.x

(PeakOemDrv.exe)

Command Line User Manual for windows 10/8.1

PCAN® is a registered trademark of PEAK-System Technik GmbH.

All other product names mentioned in this document may be the trademarks or registered trademarks of their respective companies. They are not explicitly marked by "™" or "®".

Copyright © 2020 PEAK-System Technik GmbH

Duplication (copying, printing, or other forms) and the electronic distribution of this document is only allowed with explicit permission of PEAK-System Technik GmbH. PEAK-System Technik GmbH reserves the right to change technical data without prior announcement. The general business conditions and the regulations of the license agreement apply. All rights are reserved.

PEAK-System Technik GmbH
Otto-Roehm-Strasse 69
64293 Darmstadt
Germany

Phone: +49 (0)6151 8173-20
Fax: +49 (0)6151 8173-29

www.peak-system.com
info@peak-system.com

Document version 1.2.0 (2020-06-29)

Contents

1	Introduction	5
2	Bootstrapper	5
2.1	Languages	5
2.2	Operating System and Platform	6
2.3	Command Line Switches	6
2.4	Command Line Switches Order	7
2.5	Return Code	7
3	Msi Switches	8
3.1	Display Switches	8
3.2	Public Properties	9
4	Msi Features	10
4.1	Available Features	10
5	Installation with the User Interface (UI)	11
5.1	Standard / Custom	11
5.2	Adjusted	12
6	Installation with Unattended Installation	14
6.1	Standard Installation	14
6.2	Full Installation	14
6.3	Custom Installation	15
7	Examples	17
7.1	Background Default Installation	17
7.2	Background Custom Installation with Success/Failure Message at the End	17
7.3	Background Custom Installation of Device Driver only	18
7.4	Foreground Full Installation	18

7.5	Preselected Features Installation	18
7.6	Features Preselection	19

1 Introduction

The PEAK-Drivers is a setup application used for installing device drivers and other components from PEAK-System. It allows an installation showing a user interface, or silent installation so that it can be called or used from other background applications.

2 Bootstrapper

`PeakOemDrv.exe` is an executable setup file (also known as bootstrapper), which includes several installation files (*.msi) and other resources, used for the correct installation of device drivers from PEAK-System.

It can also receive command line options and forward Msi command options. It takes care of selecting the right files to be installed, according to the operating system platform being used, and of installing any third party requisite needed by the selected features.

2.1 Languages

The installation can run in two different languages, English (language ID: 1033), and German (language ID: 1031). If it is not specified, the setup uses the current OS language for the installation. If the current language is not supported, then English is used.


2.2 Operating System and Platform

PeakOemSetup.exe allows installing 32-bit and 64-bit drivers for following Windows operating systems:

- └ Windows 8.1
- └ Windows 10

2.3 Command Line Switches

Following commands affect only the language selection dialog and the dialogs in the bootstrapper's user interface (UI). In order to also affect the Msi package please refer to the MSIEXEC command line parameters section.

 **Note:** The Msi parameters must come after the bootstrapper parameters.


/exenoui: Launches the EXE setup without UI.

 **Example:** PeakOemDrv.exe /exenoui


/exebasicui: Launches the EXE setup with basic UI.

 **Example:** PeakOemDrv.exe /exebasicui

/listlangs: Lists the languages supported by the EXE setup.

 **Example:** PeakOemDrv.exe /listlangs

/exelang <langId>: Launches the bootstrapper using the specified language.

 **Example:** PeakOemDrv.exe /exelang 1033

/exelog <path_to_log_file>: Creates a log file at the specified path with the specified name. If path and name are not specified, then the log file will be created next to the `PeakOemDrv.exe` installer having the name `PeakOemDrv.log`.

 **Example:** `PeakOemDrv.exe /exelog "C:\Temp\PEAK-Drivers.log"`

2.4 Command Line Switches Order


When passing bootstrapper command line parameters to `PeakOemDrv.exe` you cannot mix them with the standard Msi ones. The correct order is to first specify the bootstrapper switches and then the standard Msi switches.

2.5 Return Code

The `PeakOemDrv.exe` bootstrapper will return - 1 if the user presses the Cancel button while installing the prerequisites (for example, .NET Framework installation, if the feature for LIN is being installed). Otherwise, it will return the code returned by `MSIExec.exe` after running the main MSI.

3 Msi Switches

The following commands affect only the actual installer (Msi file, i.e. commands for the `MSIEXEC.exe` application), not the bootstrapper.

 **Note:** The Msi parameters must come after the bootstrapper parameters within the command line. The Msi commands are divided in 2 groups: display switches and public properties.

3.1 Display Switches

These commands are used to control the behavior of the user interface of the Msi installer. Following possibilities are offered:

- └ **/quiet:** Quiet display option.
The installer runs an installation without displaying a user interface to the user. No prompts, messages, or dialog boxes are displayed. The user cannot cancel the installation. If no reboot options are specified, the installer restarts the computer whenever necessary without displaying any prompt or warning to the user.
- └ **/passive:** Passive display option.
The installer displays a progress bar to the user that indicates that an installation is in progress, but no prompts or error messages are displayed to the user. The user cannot cancel the installation. If no reboot option is specified, the installer restarts the computer whenever necessary without displaying any prompt or warning to the user.
- └ **/q:** Sets the user interface level:
- └ **q, qn:** No UI
- └ **qb:** Basic UI. Use **qb!** To hide the Cancel button.

- └─ **qx**: Reduced UI, with no modal dialog box is displayed at the end of the installation.
- └─ **qf**: Full UI. Any authored FatalError, UserExit, or Exit modal dialog boxes are displayed at the end.
- └─ **qn+**: No UI except for a modal dialog box is displayed at the end.
- └─ **qb+**: Basic UI with a modal dialog box is displayed at the end. The modal box is not displayed if the user cancels the installation. Use **qb+!** or **qb!+** to hide the Cancel button.
- └─ **qb-**: Basic UI with no modal dialog boxes. Please note that **/qb+** is not a supported UI level. Use **qb-!** or **qb!-** to hide the Cancel button.

3.2 Public Properties

These are values that can be modified over command line to cause different behaviors within an installation. The following properties are relevant for the `PeakOemDrv.exe` setup:

- └─ **ADDLOCAL**: The value of the ADDLOCAL property is a list of features that are delimited by commas, and are to be installed locally. The possible features are listed in the section *Installation with the User Interface* (see section 5.2) and in *Installation with Unattended Installation* (see section 6.3) installation.

4 Msi Features

The `PeakOemDrv.exe` includes Msi files for the installation of the actual features. Note that some features may or may not be available, according to the platform on which the installation is being executed.

4.1 Available Features


The following features can be currently selected for install:


- **CAN device drivers:** Installs drivers for all PCAN devices based on USB, and PCI interfaces. These drivers are available for 32-bit and 64-bit systems.
- **Virtual PCAN-Gateway:** Installs drivers and tools for the virtual PCAN-Gateway device (CAN over IP). These drivers are available for 32-bit and 64-bit systems.
- **LIN device drivers:** Installs drivers and tools for the PCAN-USB Pro, and PCAN-USB pro FD LIN interfaces. These drivers are available for 32-bit and 64-bit systems.
- **Virtual PCAN drivers:** Installs drivers for the virtual PCAN device (internal device). These drivers are available for 32-bit and 64-bit systems.
- **PCAN-Basic:** Installs the application programming interface PCAN-Basic (API library), for interfacing with all device drivers of PEAK-System. This library is available for 32-bit and 64-bit systems.
- **PCAN-RP1210:** Installs the application programming interface PCAN-RP1210 C (API library), to allow existing RP1210 applications to use devices of PEAK-System. This library is available for 32-bit and 64-bit systems.

5 Installation with the User Interface (UI)


5.1 Standard / Custom


The custom installation of `PeakOemDrv.exe`, using the user UI, allows selecting the features to be installed from a list of features. The list is first shown with only one feature selected, CAN device drivers and the PEAK-Tools, which denotes the standard installation.

 **Note:** The PEAK-Tools (CAN monitor PCAN-View and the control panel applet PEAK CPL) are always installed when using the UI, i.e. they cannot be selected or deselected from the feature list (hidden feature).

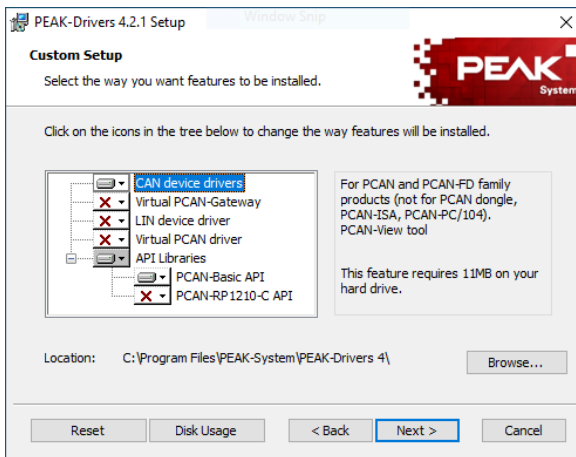

In order to customize the installation, any additional feature has to be checked for install from the list (customized).

 **Note:** There is no possibility to select all features with one click.

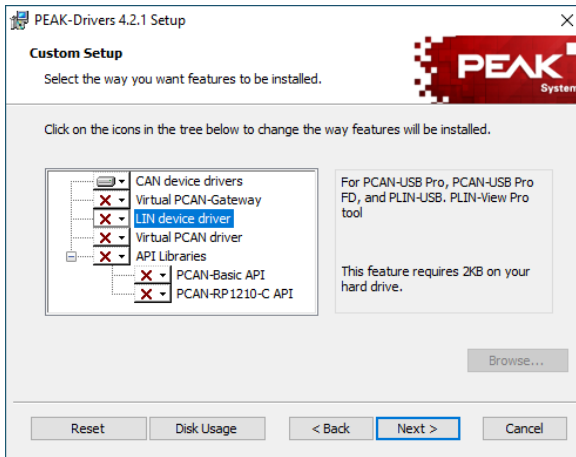

5.2 Adjusted

It is possible to preselect the features to be installed, i.e. that the desired features appear checked in the list of features to be installed. For this, the `PeakOemDrv.exe` must be called from the command line and use the `ADDLOCAL Msi property` to set the features.

Note: The specifying of all features listed below within the `ADDLOCAL` property is analog of making an install all operation.


Following Keys are used to selecting the available features using the `ADDLOCAL` property:

- └ F_PNP_DVRS: Selects the CAN device drivers feature for install.
- └ F_EVPOI: Selects the Virtual PCAN-Gateway feature for install.
- └ F_EPLIN: Selects the LIN device drivers feature for install.

- └ F_VCAN: Selects the Virtual PCAN drivers feature for install.
- └ F_PCANBASIC: Selects the PCAN-Basic feature for install.
- └ F_PCANRP1210: Selects the PCAN-RP1210 feature for install.

Example: The following command line starts the setup in English, preselects the plug and play drivers, and PCAN-Basic for install.

```
PeakOemDrv.exe /exelang 1033 ADDLOCAL=F_PNP_DVRS,  
F_PCANBASIC
```

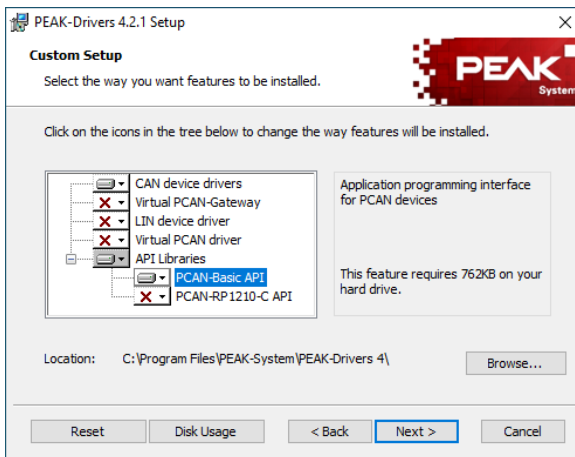

6 Installation with Unattended Installation

In order to make an unattended installation, the Msi property `ADDLOCAL` must be always used. This is because the user cannot interact with the setup application. Using this property allows a full installation, standard, or custom installation.

6.1 Standard Installation

In order to command a standard installation, i.e. installing the feature CAN device drivers and the PEAK-Tools, just call the `PeakOemDrv.exe` with any flag(s) that provoke an unattended installation.



Note: The installer selects automatically the features corresponding to the system platform where the installation is taking place (32 or 64-bit).





Example: The following command line commands the installation of the standard features, hiding the bootstrapper UI, and showing the basic UI of the Msi installer.

```
PeakOemDrv.exe /exenoui /qb
```

6.2 Full Installation

In order to command a full installation, i.e. installing all available features, use `ADDLOCAL=ALL` on the command line.


 **Note:** The installer automatically selects the features corresponding to the system platform where the installation is taking place (32/64-bit).

 **Example:** The following command line commands the installation of all features in silent mode, i.e. hiding the bootstrapper UI as well as the UI of the Msi installer.

```
PeakOemDrv.exe /exenoui /qn ADDLOCAL=ALL
```

6.3 Custom Installation

In order to customize the installation, any desired feature has to be included in the ADDLOCAL value, using its Key and separated by comma (',').

 **Note:** The Keys used in an unattended installation differ from those used when the user interaction is allowed (when the user can change the features to be installed).

Following Keys are used to selecting the available features using the property ADDLOCAL:

- └ CPL_32: Installs the PEAK-Tools, PCAN-View and PEAK CPL, as well as base information about the installation, on 32-bit systems. Note that the installation will fail, if this feature is used on 64-bit systems.
- └ CPL_64: Installs the PEAK-Tools, PCAN-View, and PEAK CPL, as well as base information about the installation, on 64-bit systems. Note that the installation will fail, if this feature is used on 32-bit systems.
- └ F_PNP_32BITS: Installs the CAN device drivers feature on 32-bit systems. Note that the installation will fail, if this feature is used on 64-bit systems.

- └─ **F_PNP_64BITS:** Installs the CAN device drivers feature on 64-bit systems. Note that the installation will fail, if this feature is used on 32-bit systems.
- └─ **F_VPOI_32BITS:** Installs the Virtual PCAN-Gateway feature on 32-bit systems. Note that the installation will fail, if this feature is used on 64-bit systems.
- └─ **F_VPOI_64BITS:** Installs the Virtual PCAN-Gateway feature on 64-bit systems. Note that the installation will fail, if this feature is used on 32-bit systems.
- └─ **F_PLIN_32BITS:** Installs the LIN device drivers feature on 32-bit systems. Note that the installation will fail, if this feature is used on 64-bit systems.
- └─ **F_PLIN_64BITS:** Installs the LIN device drivers feature on 64-bit systems. Note that the installation will fail, if this feature is used on 32-bit systems.
- └─ **F_VCAN_32BITS:** Installs the Virtual PCAN drivers feature on 32-bit systems. Note that the installation will fail, if this feature is used on 64-bit systems.
- └─ **F_VCAN_64BITS:** Installs the Virtual PCAN drivers feature on 64-bit systems. Note that the installation will fail, if this feature is used on 32-bit systems.
- └─ **F_PCANRP1210_32BITS:** Installs the PCAN-RP1210 feature on 32-bit systems. Note that the installation will fail, if this feature is used on 64-bit systems.
- └─ **F_PCANRP1210_64BITS:** Installs the PCAN-RP1210 feature on 64-bit systems. Note that the installation will fail, if this feature is used on 32-bit systems.
- └─ **F_PCANBASIC:** Installs the PCAN-Basic feature on both platforms, 32-bit and 64-bit.

Example: The following command line commands the installation of the features represented by the keys `CPL_64`, `F_VPOI_64BITS`, and `F_PCANBASIC`, on a 64-bit system in silent mode, i.e. hiding the bootstrapper UI as well as the UI of the Msi installer.

```
PeakOemDrv.exe /exenoui /qn  
ADDLOCAL=CPL_64,F_VPOI_64BITS,F_PCANBASIC
```

7 Examples

7.1 Background Default Installation

Installs the default features in silent mode (hidden). On a 32-bit system, this will install PEAK CPL (32-bit), PCAN-View, USB, and PCI drivers (32-bit).

```
PeakOemDvr.exe /exenoui /quiet
```

7.2 Background Custom Installation with Success/Failure Message at the End

Installs preselected features in silent mode (hidden). When the installation is finished, a modal dialog box with a message indicating failure or success is shown. On a 64-bit system, this will install PEAK CPL (64-bit), PCAN-View, and PCAN-Basic (32/64-bit). The current language is used (or English, if the current language is not supported):

```
PeakOemDrv.exe /exenoui /qn+  
ADDLOCAL=CPL_64,F_PCANBASIC
```

7.3 Background Custom Installation of Device Driver only

Installs the plug & play device drivers, USB, and PCI drivers, in silent mode (hidden). This will install the 32 bits drivers on 32-bits systems and 64-bits drivers on 64-bits systems.

```
wmic os get osarchitecture | findstr /C:"64"  
  
if %ERRORLEVEL% EQU 1 (.\PeakOemDrv.exe /exenoui  
/quiet ADDLOCAL=F_PNP_32BITS) ELSE  
(.\.PeakOemDrv.exe /exenoui /quiet  
ADDLOCAL=F_PNP_64BITS)
```

7.4 Foreground Full Installation

Install all features in a compact UI mode (unattended UI installation). On a 64-bit system, this will install PEAK CPL (64-bit), PCAN-View, PCAN-Basic (32/64-bit), PCAN-RP1210 (32/64-bit), PLIN drivers (64-bit), PLIN-API (32/64-bit), PLIN-View Pro, Virtual PCAN-Gateway (64-bit), and Virtual PCAN drivers (64-bit). The English language is used:

```
PeakOemDvr.exe /exelang 1033 /qr ADDLOCAL=ALL
```

7.5 Preselected Features Installation

Install features that have been preselected, not allowing the user to change the selection. On a 64-bit system, this will install PEAK CPL (64-bit), PCAN-View, PLIN drivers (64-bit), PLIN-View Pro, and PLIN-API (32/64-bit). The current language is used (or English, if the current language is not supported):

```
PeakOemDvr.exe /qr ADDLOCAL=CPL_64,F_PLIN_64BITS
```

7.6 Features Preselection

Starts the installer having some features automatically selected within the list of features. The user can still change the selection if desired. The German language is used:

```
▶ PeakOemDvr.exe /exelang 1031 ADDLOCAL=F_PNP_DVRS,  
F_EVPOI,F_PCANBASIC
```