

PCAN-TJA1054

User Manual



Relevant Product

Product name	Part number
PCAN-TJA1054	IPEH-002039

Imprint

PCAN is a registered trademark of PEAK-System Technik GmbH. CANopen®, CANopen FD® and CiA® are registered community trade marks of CAN in Automation e.V.

All other product names in this document may be the trademarks or registered trademarks of their respective companies. They are not explicitly marked by ™ or ®.

© 2024 PEAK-System Technik GmbH

Duplication (copying, printing, or other forms) and the electronic distribution of this document is only allowed with explicit permission of PEAK-System Technik GmbH. PEAK-System Technik GmbH reserves the right to change technical data without prior announcement. The general business conditions and the regulations of the license agreement apply. All rights are reserved.

PEAK-System Technik GmbH
Leydheckerstraße 10
64293 Darmstadt
Germany

Phone: +49 6151 8173-20
Fax: +49 6151 8173-29

www.peak-system.com
info@peak-system.com

Document version 3.0.0 (2024-06-13)

Contents

Imprint	2
Relevant Product	2
Contents	3
1 Introduction	4
1.1 Properties at a Glance	5
1.2 Scope of Supply	6
1.3 Prerequisites	6
2 Connectors	7
2.1 Connecting the High-speed CAN Side	7
2.2 Connecting the Low-speed CAN Side	8
3 Operation	10
3.1 Bit Rate	10
3.2 Low Power Modes	10
3.3 Status LED	11
3.4 Red Error LED	11
4 Technical Specifications	12
Appendix A CE Certificate	14
Appendix B UKCA Certificate	15
Appendix C Dimension Drawing	16
Appendix D Quick Reference	17
Appendix E Disposal	19

1 Introduction

The PCAN-TJA1054 bus converter establishes a connection between a High-speed CAN bus (ISO 11898-2) and a Low-speed CAN bus (ISO 11898-3). One of the most important potential applications of the bus converter is a simple connection between a PEAK CAN interface (e.g., PCAN-USB) and a Low-speed CAN bus.

Low-speed CAN (LS-CAN)

The LS-CAN is primarily intended for low-speed applications up to 125 kbit/s in passenger cars. Like the High-speed CAN (HS-CAN) the LS-CAN transmits signals differentially through two wires. However, its fault tolerance (e.g. at a short circuit) automatically provides an operation with only a single wire.



Tip: At the end of this manual (Appendix D) you can find a quick reference with brief information about the operation of the PCAN-TJA1054.

1.1 Properties at a Glance

- Adapter from High-speed CAN to Low-speed CAN
- Bit rates up to 125 kbit/s
- CAN transceiver NXP PCA82C251 and TJA1055
- Termination resistors for Low-speed CAN can be switched (560 Ohm / 5.66 kOhm)
- Power LED
- Error LED (Low-speed CAN)
- CAN bus connection via D-Sub, 9-pin (in accordance with CiA® 106)
- 5-Volt power supply through pin 1 of the High-speed CAN connection. Nearly all CAN interfaces by PEAK-System can provide the required supply
- Extended operating temperature range from -40 to +85 °C (-40 to +185 °F)



Note: You can find additional information about the properties and the behavior of the LS-CAN transceiver TJA1055 in the corresponding data sheet, which you can download, e.g. from the NXP website:

www.nxp.com.

1.2 Scope of Supply

- Adapter in plastic casing
- Manual in PDF format


1.3 Prerequisites

- HS-CAN component capable of routing a 5-Volt supply to the CAN connector (can be set for all CAN interfaces from the PCAN series)

2 Connectors

2.1 Connecting the High-speed CAN Side

The PCAN-TJA1054 is designed for a direct connection to a HS-CAN component (e.g. PCAN-USB). The HS-CAN side has a 9-pin D-Sub connector. The pin assignment corresponds to the specification CiA® 106.

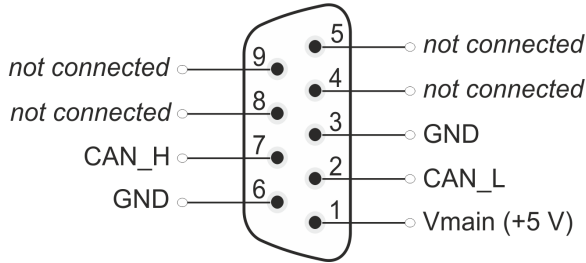

Pin assignment HS-CAN



Attention! Make sure, that the HS-CAN component always is turned off when connecting or disconnecting the PCAN-TJA1054. Otherwise the PCAN-TJA1054 or the connected hardware may be damaged or destroyed.

Between CAN_L and CAN_H a terminating resistor of 60 Ω is installed internally. Therefore an additional line termination is not needed for the connected HS-CAN component.


For power supply the PCAN-TJA1054 uses a direct voltage of +5 V (V_{main}). This must be applied to pin 1 of the HS-CAN connector.



Note: Please see the documentation of the HS-CAN component the PCAN-TJA1054 shall be connected to, to obtain information about a power supply on pin 1.

2.2 Connecting the Low-speed CAN Side

For the connection of the LS-CAN bus a 9-pin D-Sub port is used. The assignment is as follows:

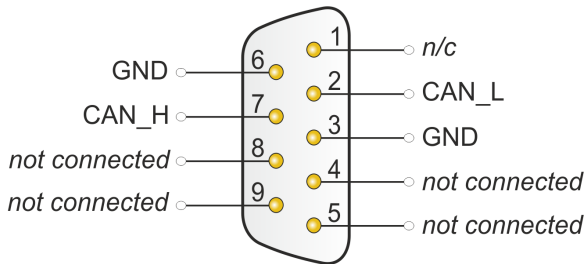

Pin assignment LS-CAN

Bus termination Low-speed CAN

Every node in a Low-speed CAN has a terminating resistor. For optimum system conditions the whole CAN bus should be terminated with 100 Ω (parallel connection of all terminating resistors). A single node should be terminated with at least 500 Ω and at most 6 k Ω .

To simplify the adaptation of the PCAN-TJA1054 to an existing CAN bus you can switch between the terminating resistors 560 Ω and 5.66 k Ω using the slide switch.

For smaller CAN buses or for testing a single component the slide switch should be set to 560 Ω . For monitoring or configuration of existing CAN buses, that are already

optimized regarding termination, the slide switch should be set to 5,66 k Ω to minimize an influence on the total termination.

3 Operation

3.1 Bit Rate

Make sure that the bit rate of the connected HS-CAN component matches the bit rate of the LS-CAN bus for operating the PCAN-TJA1054. No conversion or automatic adaptation of the bit rate is done in the PCAN-TJA1054.

3.2 Low Power Modes



Note: The LS-CAN transceiver always works with the normal operation mode. The operation in one of the low-power modes "Sleep" or "Standby" is not possible.

Because the PCAN-TJA1054 is connected to further hardware (controllers, for example) only through the CAN bus, it is not capable of activating one of the low-power modes.

If the PCAN-TJA1054 shall be connected to the LS-CAN bus of a motor vehicle, that uses a low-power mode, the following should be considered:

In a low-power mode all transceivers in a motor vehicle terminate CAN_L against the battery. However, the PCAN-TJA1054 still terminates CAN_L against VCC. On CAN_L the voltage adjusts to a level above or below the recognition threshold for short circuits on CAN_L (7.3 V) depending on the network size and termination.

If the voltage on CAN_L stays below 7.3 V, a shunt current leads to an increased current consumption in the motor vehicle.

If however the voltage on CAN_L is above 7.3 V, the PCAN-TJA1054 detects a short circuit on CAN_L and switches to single wire operation (CAN_H). The communication is ensured but an error is indicated by the red LED (see section 3.4 *Red Error LED*).

3.3 Status LED

LED	Meaning
Green	Power, Voltage supply +5 V
Red	Error, Error condition on the LS-CAN bus

3.4 Red Error LED

The red LED indicates the state of the error output of the LS-CAN transceiver. This output is active for the following error conditions on the Low-speed CAN side:

- Interrupt on CAN_H
- Interrupt on CAN_L
- Short circuit between CAN_H and GND
- Short circuit between CAN_H and VCC
- Short circuit between CAN_L and GND
- Short circuit between CAN_L and VCC
- Short circuit between CAN_H and CAN_L

Please see the NXP data sheet for the CAN transceiver TJA1055 for further details.

4 Technical Specifications

CAN

High-speed CAN	Specification	ISO 11898-2, CAN specifications 2.0A and 2.0B
	Transceiver	PCA82C251
	Connector	D-Sub socket, 9-pin Pin assignment in accordance with CiA® 106
	Termination (internal)	62 Ω (fixed)
Low-speed CAN	Specification	ISO 11898-3
	Transceiver	TJA1055
	Connector	D-Sub-Stecker, 9-polig
	Termination (internal)	560 Ω oder 5,66 kΩ (umschaltbar)
Bit rate	max. 125 kbit/s	

Power supply

Supply voltage	+5 V DC ± 0.25 V via pin 1 of D-Sub socket	
Current consumption	Normal operation:	20 to 30 mA
	Error case:	40 mA
	Maximum:	80 mA (peak)

Measures

Size	50 x 32 x 17 mm (L x W x H) See also Appendix C <i>Dimension Drawing</i>	
Weight	25 g	

Environment

Operating temperature	-40 to +85 °C (-40 to +185 °F)	
Temperature for storage and transport	-40 to +100 °C (-40 to +212 °F)	

Environment

Relative humidity	15 to 90 %, not condensing
Ingress protection (IEC 60529)	IP20

Conformity

RoHS	EU Directive 2011/65/EU (RoHS 2) + 2015/863/EU (revised list of restricted substances) DIN EN IEC 63000:2019-05
EMC	EU Directive 2014/30/EU DIN EN 55032:2022-08 DIN EN 55035:2018-04

Appendix A CE Certificate

EU Declaration of Conformity



This declaration applies to the following product:

Product name: **PCAN-TJA1054**
Item number(s): **IPEAH-002039**
Manufacturer: PEAK-System Technik GmbH
Leydheckerstraße 10
64293 Darmstadt
Germany



We declare under our sole responsibility that the mentioned product is in conformity with the following directives and the affiliated harmonized standards:

EU Directive 2011/65/EU (RoHS 2) + 2015/863/EU (amended list of restricted substances)

DIN EN IEC 63000:2019-05

Technical documentation for the assessment of electrical and electronic products with respect to the restriction of hazardous substances (IEC 63000:2016);
German version of EN IEC 63000:2018

EU Directive 2014/30/EU (Electromagnetic Compatibility)

DIN EN 55032:2022-08

Electromagnetic compatibility of multimedia equipment - Emission requirements (CISPR 32:2015);
German version of EN 55032:2015 + AC:2016 + A11:2020 + A1:2020

DIN EN 55035:2018-04

Electromagnetic compatibility of multimedia equipment - Immunity requirements (CISPR 35:2016, modified);
German version of EN 55035:2017

Darmstadt, 7 June 2024

A handwritten signature in black ink, appearing to read "Uwe Wilhelm".

Uwe Wilhelm, Managing Director

Appendix B UKCA Certificate

UK Declaration of Conformity



This declaration applies to the following product:

Product name: **PCAN-TJA1054**

Item number(s): **IPEAH-002039**

Manufacturer:

PEAK-System Technik GmbH
Leydheckerstraße 10
64293 Darmstadt
Germany

UK authorized representative:

Control Technologies UK Ltd
Unit 1, Stoke Mill,
Mill Road, Sharnbrook,
Bedfordshire, MK44 1NN, UK



We declare under our sole responsibility that the mentioned product is in conformity with the following UK legislations and the affiliated harmonized standards:

The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012

DIN EN IEC 63000:2019-05

Technical documentation for the assessment of electrical and electronic products with respect to the restriction of hazardous substances (IEC 63000:2016);
German version of EN IEC 63000:2018

Electromagnetic Compatibility Regulations 2016

DIN EN 55032:2022-08

Electromagnetic compatibility of multimedia equipment - Emission requirements (CISPR 32:2015);
German version of EN 55032:2015 + AC:2016 + A11:2020 + A1:2020


DIN EN 55035:2018-04

Electromagnetic compatibility of multimedia equipment - Immunity requirements (CISPR 35:2016, modified);
German version of EN 55035:2017

Darmstadt, 7 June 2024

Uwe Wilhelm, Managing Director


Appendix C Dimension Drawing

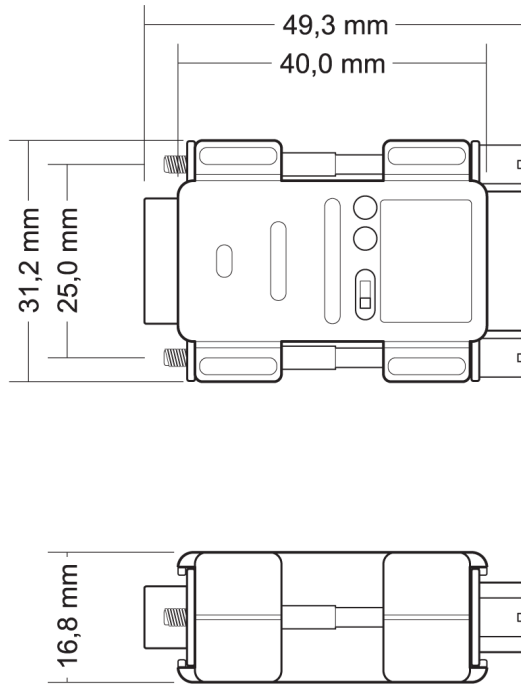

The figure doesn't show the actual size of the product.


Appendix D Quick Reference

High-speed CAN socket

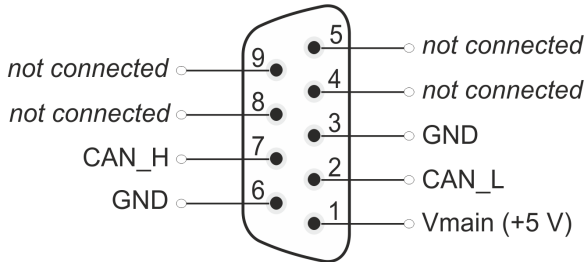

Connect or disconnect the PCAN-TJA1054 only, when the relevant HS-CAN component is turned off!

Low-speed CAN plug

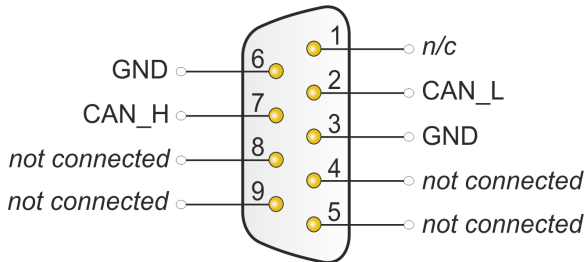

Slide switch Low-speed CAN termination

- 560 Ω for building smaller networks, testing single components
- 5.66 k Ω for monitoring or configuring existing networks (already terminated optimally)

Status LEDs

LED	Meaning
Green	Power, Voltage supply +5 V
Red	Error, Error condition on the LS-CAN bus

Bit rate

Is configured in the connected HS-CAN component. Make sure that the bit rate of the connected HS-CAN component matches the bit rate of the LS-CAN bus for operating the PCAN-TJA1054.

Appendix E Disposal

The PCAN-TJA1054 must not be disposed of with household waste. Dispose of this electronic device in accordance with local regulations.