

PCAN-USB X6

User Manual



Relevant Products

Product name	Model	Attribute	Part number
PCAN-USB X6 with D-Sub connectors		Red corners	IPEH-004062
PCAN-USB X6 with D-Sub connectors	galvanic isolation for CAN connection	Gray corners	IPEH-004064
PCAN-USB X6 with M12 connectors	galvanic isolation for CAN connection	Gray corners	IPEH-004063

The cover picture shows the products PCAN-USB X6 with M12 connectors (left) and with D-Sub connectors (right).

Imprint

PCAN is a registered trademark of PEAK-System Technik GmbH. CiA® is a registered community trade mark of CAN in Automation e.V.

All other product names in this document may be the trademarks or registered trademarks of their respective companies. They are not explicitly marked by ™ or ®.

© 2023 PEAK-System Technik GmbH

Duplication (copying, printing, or other forms) and the electronic distribution of this document is only allowed with explicit permission of PEAK-System Technik GmbH. PEAK-System Technik GmbH reserves the right to change technical data without prior announcement. The general business conditions and the regulations of the license agreement apply. All rights are reserved.

PEAK-System Technik GmbH
Otto-Röhm-Straße 69
64293 Darmstadt
Germany

Phone: +49 6151 8173-20
Fax: +49 6151 8173-29

www.peak-system.com
info@peak-system.com

Document version 2.1.0 (2023-08-31)

Contents

Imprint	2
Relevant Products	2
Contents	3
1 Introduction	5
1.1 Properties at a Glance	6
1.2 System Requirements	7
1.3 Scope of Supply	7
2 Connectors	8
2.1 PCAN-USB X6 with D-Sub Connectors	8
2.2 PCAN-USB X6 with M12 Connectors	10
2.3 Internal Termination	12
2.4 Cabling	15
3 Installation	17
3.1 Install Device Driver Setup	17
3.2 Prepare Power Supply	17
3.3 Connect the PCAN-USB X6	18
3.4 Connect the CAN-Bus	18
3.5 Example Application under Windows	18
4 Operation	19
4.1 Status LEDs	19
4.2 Unplugging the USB Connection	20
4.3 Distinguishing Several PCAN-USB X6	20
5 CAN Monitor PCAN-View	21
5.1 Initialize CAN interface	22
5.2 Transmit CAN message	24
5.3 Additional Tabs	25
6 API PCAN-Basic	30
6.1 Features of PCAN-Basic	31
6.2 Principle Description of the API	32

7 Technical Data	33
Appendix A CE Certificate	35
Appendix B UKCA Certificate	36
Appendix C Dimension Drawings	37
PCAN-USB X6 with D-Sub Connectors	37
PCAN-USB X6 with M12 Connectors	38
Appendix D Quick Reference	39
Appendix E Linux	41
Appendix F Disposal	42

1 Introduction

The PCAN-USB X6 is a CAN FD interface for the USB port which allows the connection of up to 6 CAN FD or CAN busses. The device is therefore best suited for working with multiple CAN networks like the use in test benches with hardware-in-the-loop (HIL) simulations for motor vehicles or in the product line testing of CAN-based products.

The PCAN-USB X6 is installed in an aluminum profile casing and is shipped in versions with D-Sub connectors or M12 circular connectors. Especially the M12 version is suitable for use in harsh environments. In addition, a galvanic isolation of up to 300 Volts between the PC and the CAN side is guaranteed for the decoupled versions.

The CAN FD standard (CAN with Flexible Data rate) is primarily characterized by higher bandwidth for data transfer. The maximum of 64 data bytes per CAN FD frame (instead of 8 so far) can be transmitted with bit rates up to 12 Mbit/s. CAN FD is downward-compatible to the CAN 2.0 A/B standard, thus CAN FD nodes can be used in existing CAN networks. However, in this case the CAN FD extensions are not applicable.

The monitor software PCAN-View and the programming interface PCAN-Basic for the development of applications with CAN connection are included in the scope of supply and support the standard CAN FD.



This manual describes the use of the CAN interface with **Windows**.
Device drivers and application information for **Linux**:
www.peak-system.com/quick/DL-Driver-E



At the end of this manual you can find a Quick Reference with brief information about the installation and operation of the CAN interface.

1.1 Properties at a Glance

- CAN interface for High-speed USB 2.0 (compatible to USB 1.1 and USB 3.0)
- 6 High-Speed CAN channels (ISO 11898-2)
 - Comply with CAN specifications 2.0 A/B and FD
 - CAN FD support for ISO and Non-ISO standards switchable
 - CAN FD bit rates for the data field (64 bytes max.) from 25 kbit/s up to 12 Mbit/s
 - CAN bit rates from 25 kbit/s up to 1 Mbit/s
 - FPGA implementation of the CAN FD controller
 - NXP TJA1044GT CAN transceiver
 - Alternative pluggable transceiver modules on request
- Galvanic isolation on the CAN connection up to 300 V (only for IPEH-004063 and IPEH-004064)
- Time stamp resolution 1 μ s
- Status LEDs for CAN channels, USB upstream, and power supply
- CAN connection via D-Sub, 9-pin or M12 circular connectors, 5-pin (pin assignment of both connectors in accordance with CiA® 106)
- Aluminum casing with increased Ingress Protection IP64 (only for IPEH-004063)
- High-speed USB 2.0 downstream port (only for IPEH-004062 and IPEH-004064)
- CAN termination can be activated through solder jumpers, separately for each CAN channel
- Measurement of bus load including error frames and overload frames on the physical bus
- Induced error generation for incoming and outgoing CAN messages
- Power supply from 8 to 30 V
- Extended operating temperature range from -40 to +85 °C (-40 to +185 °F)

1.2 System Requirements

- Voltage supply in the range of 8 to 30 V DC

Computer with:

- Operating system Windows 11 (x64/ARM64), 10 (x64), or Linux
- A vacant USB port (USB 1.1, USB 2.0 or USB 3.0) or a self-powered USB hub



Attention! Do not use a USB extension cable to connect the CAN interface to the computer. Extension cables does not comply with the USB specification.

1.3 Scope of Supply

- PCAN-USB X6 in aluminum casing including 4 mounting brackets
- IPEH-004062 and IPEH-004064: Mating connector for power supply
- IPEH-004063: Cables for power supply and USB connection




Note: The scope of supply does not contain a power supply unit for the device. There is no supply via the USB connection to the PC.

Downloads

- Device drivers for Windows 11 (x64/ARM64), 10 (x64), and Linux
- CAN monitor PCAN-View for Windows
- Programming interface PCAN-Basic for developing applications with CAN connection
- Programming interfaces for standardized protocols from the automotive sector
- Manual in PDF format



2 Connectors

2.1 PCAN-USB X6 with D-Sub Connectors

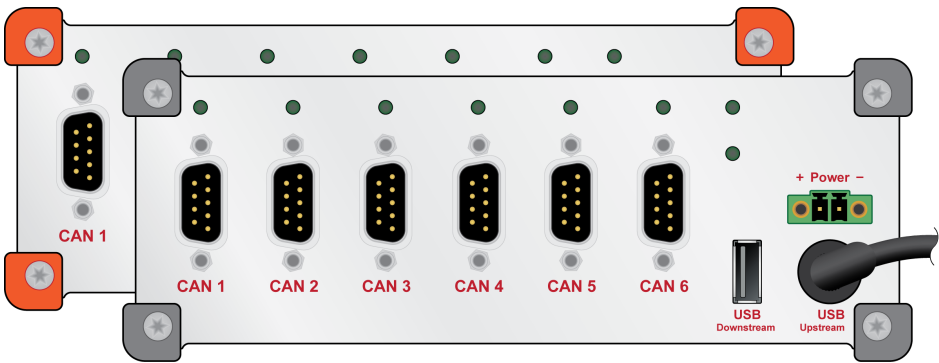

2.1.1 Power Supply over Mating Connector


The power supply is possible in a range from 8 to 30 V DC. The "Power" input is electronically protected with reverse polarity and overvoltage protection. The power supply is connected via the supplied mating connector.

Power supply	Mating connector	Polarity	
		V+	1
		GND	2

Mating connector: Phoenix Contact MC1.5/2-STF-3.81 - 1827703

2.1.2 CAN Connection

The pin assignment for CAN corresponds to the specification CiA® 106:

Pin	Assignment	D-Sub connector
1	None	
2	CAN_Low	
3	CAN_GND	
4	None	
5	None	
6	CAN_GND	
7	CAN_High	
8	None	
9	None	

2.1.3 USB Upstream

For connecting the PCAN-USB X6 to a computer.


2.1.4 USB Downstream

For general use of USB devices. The USB Downstream port is passed through to the computer and is used to connect another USB device to the computer.



Attention! Connecting another CAN interface to the USB downstream port is not as intended.


2.2 PCAN-USB X6 with M12 Connectors

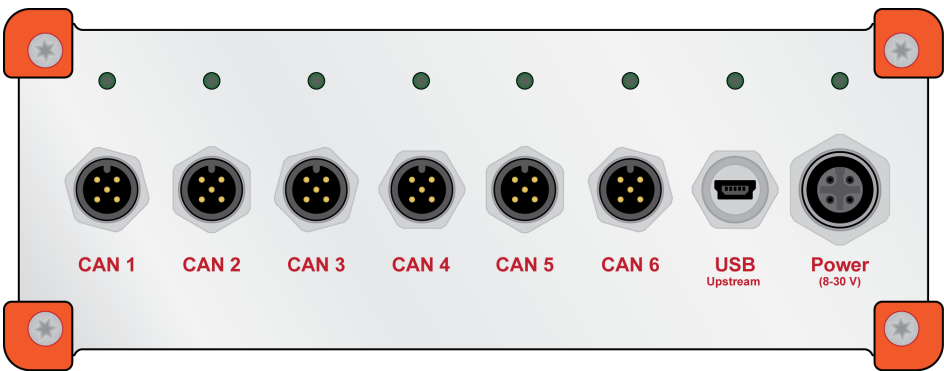



2.2.1 Power Supply

The power supply via the female panel connector is possible in a range from 8 to 30 V DC. The "Power" input is electronically protected with reverse polarity and overvoltage protection.

The power supply is connected via the supplied power cable:





The pin assignment is as follows:

M12 female panel connector „Power“	M12 male cable connector on power cable	Pin	Assignment
		1	V+
		2	None
		3	GND
		4	None


2.2.2 CAN Connection

The pin assignment of the six M12 male panel connectors corresponds to the specification CiA® 106:

M12 male panel connectors (CAN connectors 1 to 6)	M12 female cable connector on CAN bus	Pin	Assignment
		1	Shield
		2	None
		3	CAN_GND
		4	CAN_High
		5	CAN_Low

Maximum Diameter of M12 Female Cable Connector

The distance between the M12 male panel connector is 19 mm. Therefore, the maximum outer diameter of the M12 female cable connector is limited to 18 mm for a proper connection.

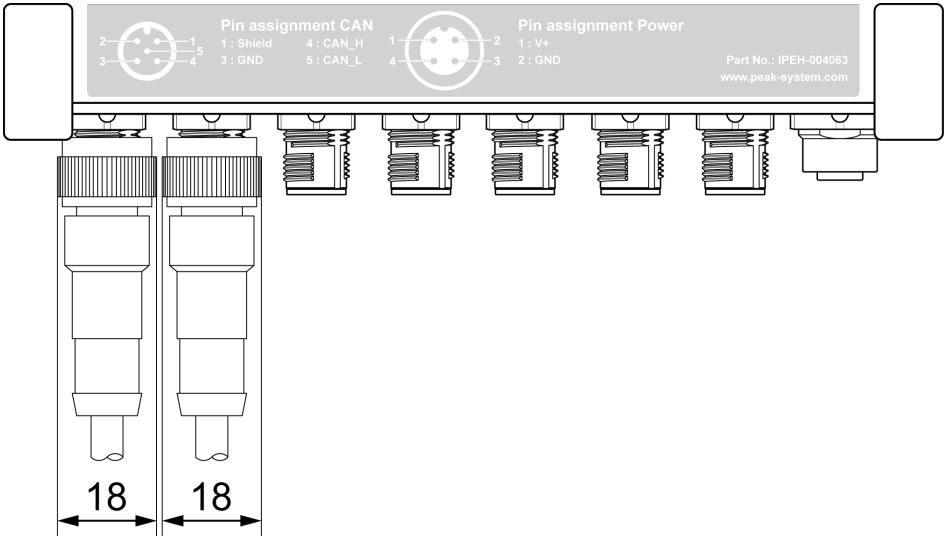

Recommendations for Suitable M12 Female Cable Connectors

The M12 male panel connector for CAN on PCAN-USB X6 are from the manufacturer Phoenix, type "Speedcon". With the associated M12 female cable connector, the connection is made with a quick-release fastener. Cable connectors of other types are screwed on. Among others, the following assembled M12 female cable connectors with free cable end are suitable:

Manufacturer	Series	Type	Example	Order Number
Phoenix	SAC-5P	FS-SCO	SAC-5P- 5,0-920/FS SCO	1518229
Phoenix	SAC-5P	M12FS	SAC-5P- 5,0-920/M12FS	1507489
Binder	763	unshielded	M12-A female cable connector, Contacts: 5	77 3430 0000 20005-0500
Binder	763	shielded	M12-A female cable connector, Contacts: 5	77 3530 0000 50705-0500

2.2.3 USB Upstream

The connection of the PCAN-USB X6 to the computer is done via the supplied USB cable:



2.3 Internal Termination

For each CAN channel a termination can be activated via solder bridges on the board. This switches a resistor of 120 Ω between CAN_High and CAN_Low. The conversion is done for an additional improvement of the CAN signal as split termination.



Tip: We recommend to do termination at the CAN cabling, for example with the terminating resistors PCAN-Term (IPEK-003002) or PCAN-MiniTerm (IPEK-003002-Mini). Thus, CAN nodes can be flexibly connected to the bus.

Further notes on termination with terminating resistors can be found in chapter 2.4 *Cabling*.

2.3.1 Activate Internal Termination




Risk of short circuit! Soldering on the CAN interface may only be performed by qualified electrical engineering personnel.



Attention! Electrostatic discharge (ESD) can damage or destroy components on the card. Take precautions to avoid ESD.

1. Loosen the four Torx screws of the front panel of the case.
2. Remove the front panel including the mainboard .
3. Remove the transceiver module(s) to reach the desired solder field(s). Loosen the screw and pull off the transceiver module.
The following figure shows the position of the transceiver modules and the solder fields.
4. Set the solder bridge(s) according to the desired settings.
The following table contains the possible settings.
5. Plug on the transceiver modules and fix each transceiver with the corresponding screw.
6. Insert the board including the mainboard carefully back into the case.
PCAN-USB X6 with M12 connectors: Make sure that the seal is correctly seated.
7. Fasten the front panel with the four Torx screws.

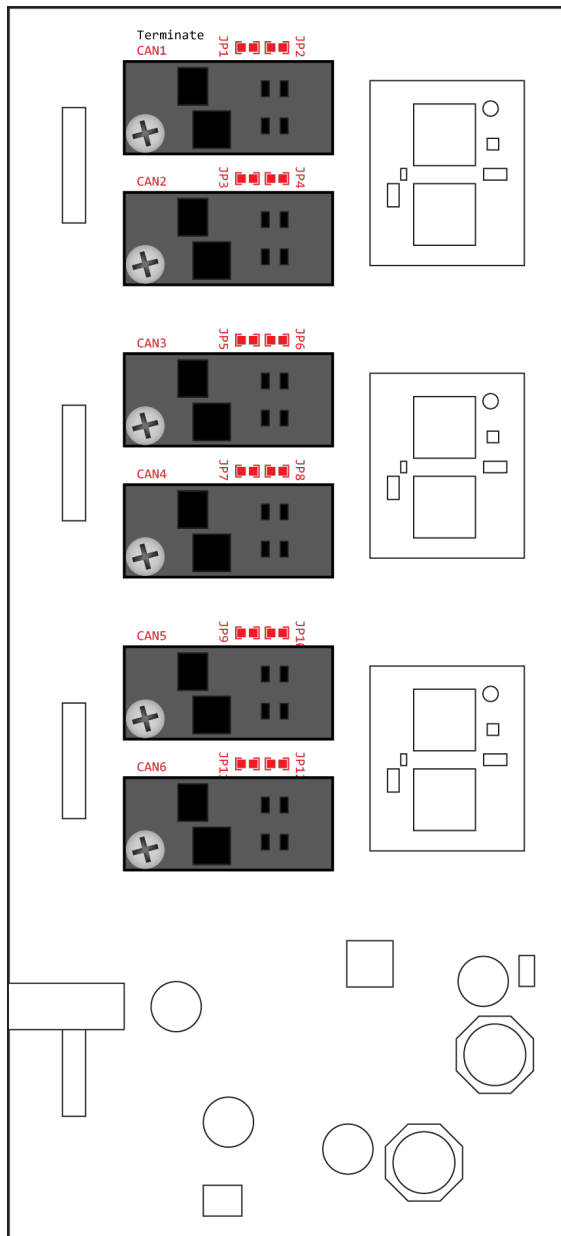

Top view on the solder fields (red) and transceiver modules (dark grey) of the mainboard

Solder fields:

CAN1: JP1, JP2













CAN2: JP3, JP4

CAN3: JP5, JP6

CAN4: JP7, JP8

CAN5: JP9, JP10

CAN6: JP11, JP12


D-Sub/M12 connectors	Solder fields	Internal termination	
		Without (standard)	Active
CAN 1	JP1 und JP2		
CAN 2	JP3 und JP4		
CAN 3	JP5 und JP6		
CAN 4	JP7 und JP8		
CAN 5	JP9 und JP10		
CAN 6	JP11 und JP12		

2.4 Cabling

2.4.1 Termination

The High-speed CAN bus (ISO 11898-2) must be terminated with 120 Ω on both ends. The termination prevents interfering signal reflections and ensures the proper operation of the transceivers of the connected CAN nodes (CAN interfaces, control devices).

2.4.2 Example of a Connection

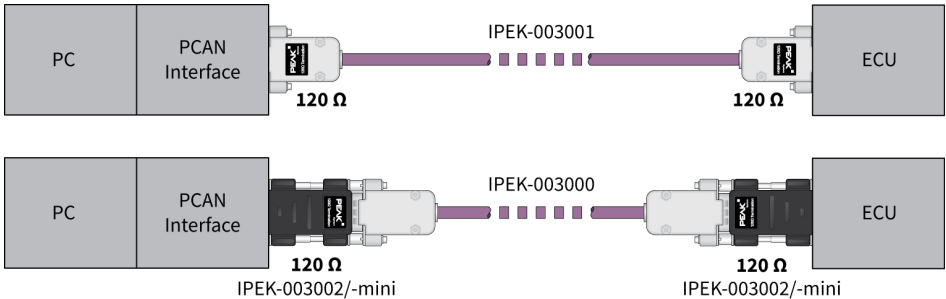

This example shows a connection between the PCAN Interface and a control unit (ECU). The upper example shows a connection with a cable which is terminated with 120 Ω at both ends. At the lower example the connection is made with termination adapters.

2.4.3 Maximum Bus Length

The maximum bus length depends primarily on the bit rate:

Nominal bit rate	Buslength
1 Mbit/s	40 m
500 kbit/s	110 m
250 kbit/s	240 m
125 kbit/s	500 m
50 kbit/s	1.3 km
25 kbit/s	2.5 km

The listed values have been calculated on the basis of an idealized system and can differ from reality.

3 Installation

This chapter covers the software setup for the CAN interface PCAN-USB X6 under Windows and its connection to the computer.

Note: For installation on Linux, see Appendix E *Linux*.

Install the driver before you connect the CAN interface.

3.1 Install Device Driver Setup

1. Download the device driver setup from our website:
www.peak-system.com/quick/DL-Driver-E
2. Unpack the file `PEAK-System_Driver-Setup.zip`
3. Double-click the file `PeakOemDrv.exe`
The driver setup starts.
4. Follow the program instructions.

3.2 Prepare Power Supply

Select a power supply with a nominal voltage between 8 and 30 V DC.

PCAN-USB X6 with D-Sub Connectors

Connect the supplied mating connector to the power supply cable.

PCAN-USB X6 with M12 Connectors

Connect the supplied power cable to the power supply.

3.3 Connect the PCAN-USB X6

1. Connect the power supply to the PCAN-USB X6.
2. Connect the PCAN-USB X6 to a USB port on the computer or to a USB hub.
Windows detects the new hardware and completes the driver installation.
3. Check the LEDs of the CAN channels on the PCAN-USB X6.
If the LEDs are green, then the driver was initialized successfully.



Attention! Do not use a USB extension cable to connect the CAN interface to the computer. Extension cables does not comply with the USB specification.

3.4 Connect the CAN-Bus

Connect a CAN bus to each of one or more CAN ports.

3.5 Example Application under Windows

As an example application for accessing the CAN interface, run the CAN monitor PCAN-View from the Windows Start menu.

4 Operation

4.1 Status LEDs

CAN channels

The status LEDs of the six CAN channels can assume the following states:

Status	Meaning
Green on	There's a connection to a driver of the operating system.
Green slow blinking	A software application is connected to the CAN channel.
Green quick blinking	Data is transmitted via the connected CAN bus.
Red blinking	An error is occurring during the transmission of CAN data.
Orange quick blinking	Identification of a channel by the PCAN-View software.

USB Upstream



Note: The status LED of the USB upstream is only lit, when it is connected to a USB 2.0 port or higher.

The status LEDs of the USB upstream can assume the following states:

Status	Meaning
Green on	A power supply and a connection via the USB upstream exist. The device is ready for use.
Orange on	There is only a connection via the USB upstream. The device is not ready for use.

power Supply

The status LED of the power supply can assume the following states:

Status	Meaning
Green on	A power supply is connected.


4.2 Unplugging the USB Connection

On Windows, the icon for removing hardware safely is not used with the PCAN-USB X6. You can unplug the PCAN-USB X6 from the computer without any preparation.

4.3 Distinguishing Several PCAN-USB X6

You can operate several PCAN-USB X6 on a single computer at the same time. The supplied program PCAN-View allows the assignment of device IDs in order to distinguish the several CAN interfaces in a software environment.

5 CAN Monitor PCAN-View

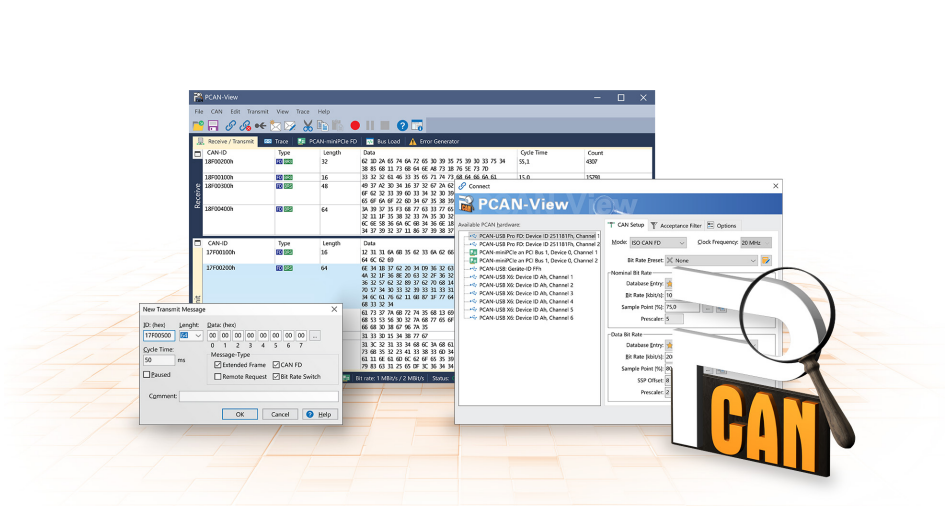

The CAN monitor PCAN-View is a Windows software for viewing, sending, and recording CAN and CAN FD messages. The software is installed with the installation of the device driver package under Windows.

In the following the initialization of a CAN interface is described as an example.

Detailed information about using PCAN-View can be found in the program window under the menu item *Help*.

5.1 Initialize CAN interface

1. Open the program *PCAN-View* via the Windows Start menu.
- Depending on the CAN interface the *Connect* dialog is displayed with or without settings for CAN FD.

CAN

BTR 0	BTR 1	Sample Point	Tq	Nq	SJW
00h	05h	66 %	125 ns	8	1
00h	14h	75 %	125 ns	8	1
00h	23h	62 %	125 ns	8	1
00h	32h	50 %	125 ns	8	1
01h	01h	75 %	250 ns	4	1
01h	10h	50 %	250 ns	4	1
40h	14h	75 %	125 ns	8	2
40h	23h	62 %	125 ns	8	2

CAN FD

CAN interface

USB Interface, 1-channel

see example above

USB Interface, 2-channel

PCAN-USB Pro FD: Device ID 251181Fh, Channel 1


PCAN-USB Pro FD: Device ID 251181Fh, Channel 2

PCIe Interface, 2-channel

PCAN-PCI Express at PCI Bus 1, Device 0, Channel 1

PCAN-PCI Express at PCI Bus 1, Device 0, Channel 2

2. If there are several CAN interfaces, select the desired interface. For multiple channels, select the desired channel from the list.
3. Enter the *bit rate(s)* and other settings according to the connected CAN bus.
4. Confirm the entries with *OK*. The main window appears and displays the *Receive / Transmit* tab.


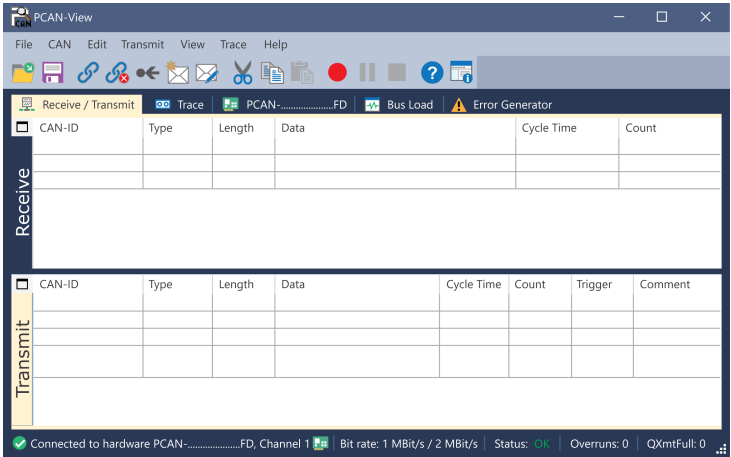


5. For initializing another channel or CAN interface, open another instance of *PCAN-View*.

5.2 Transmit CAN message

1. Select the menu command *Transmit / New Message*.

Depending on the CAN interface, the dialog box *New Transmit Message* is displayed with or without settings for CAN FD.

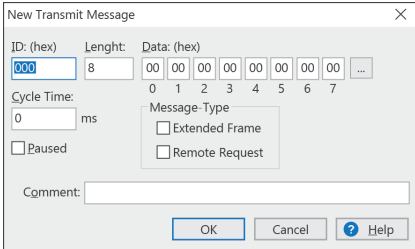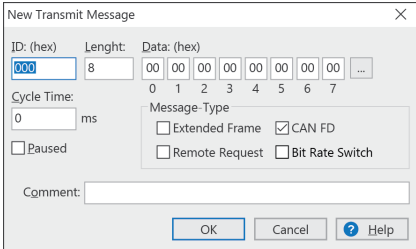
CAN	CAN FD
	

1. Enter the *ID*, *Length* and *Data* of the message. Other settings can be made according to the connected CAN bus.
2. Enter a value into the *Cycle Time* field to choose manually or periodically message transmission.
To transmit periodically enter a value greater than 0.
To transmit only manually enter the value 0.
3. Confirm the entries with *OK*.
The created transmit message appears on the *Receive / Transmit* tab.
4. To send the message manually, select the menu command *Transmit > Send* or press the space bar.
The manual transmission process is performed additionally for periodically transmitted CAN messages.

5.3 Additional Tabs


Depending on the CAN interface, additional tabs are available.

5.3.1 Trace Tab

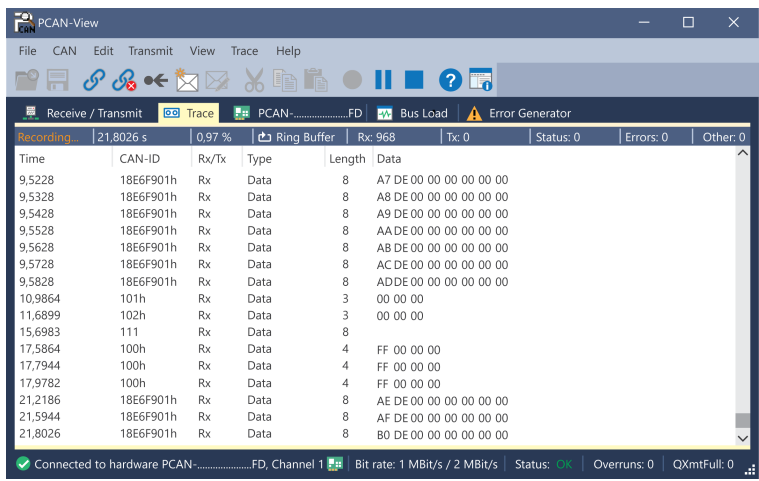


The tracer (data logger) records the communication of the CAN bus in linear or ring buffer mode. The trace data can be saved to a file.

5.3.2 CAN Interface Tab

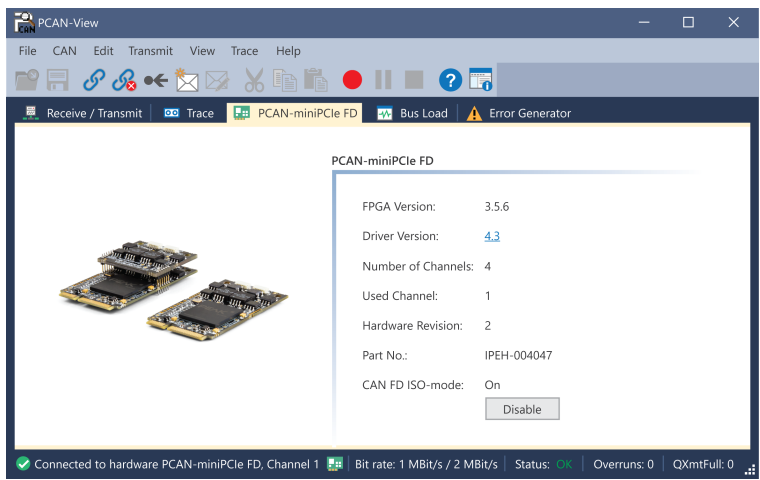


The *CAN interface* tab shows information about the hardware and the used Windows device driver. In this case exemplary for the PCAN-miniPCIe FD. Depending on the CAN interface, a hardware ID can be determined to distinguish several interfaces of the same type. For interfaces with CAN FD a transmission according to "ISO" or "Non-ISO" can be set as default of the hardware.

5.3.3 Bus Load Tab

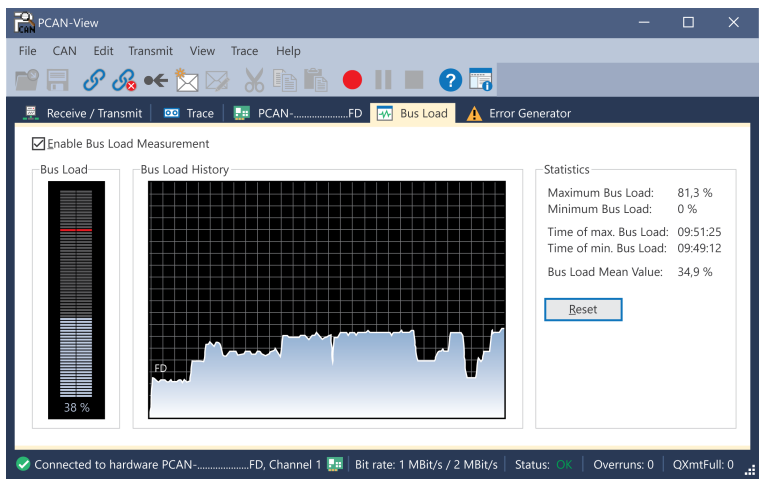

The *Bus Load* tab displays the current bus load, its time history and statistical information of the connected CAN channel.

5.3.4 Error Generator Tab

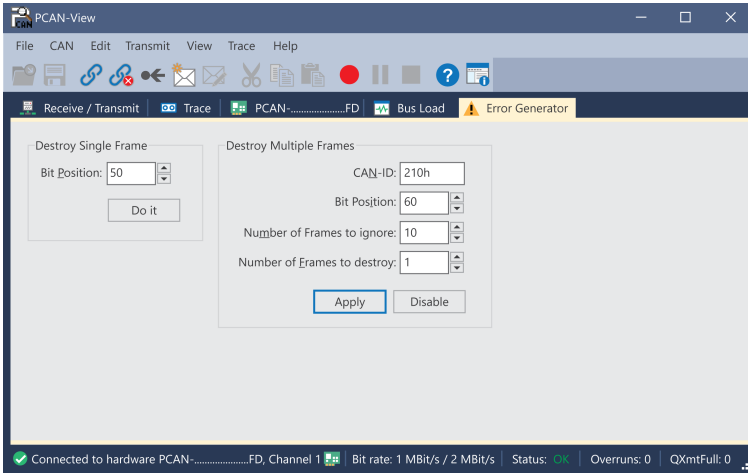

Via the *Error Generator* tab the communication on the CAN bus in test environments or during the development of CAN buses can be disturbed in a controlled way by 6 consecutive dominant bits. This is a violation of the CAN protocol on the CAN bus which must be recognized as an error by the connected CAN nodes.



Note: The Error Generator should only be used by experienced users and in the development environment. For further information, please contact our customer support: support@peak-system.com

You can destroy CAN frames with the error generator by one of two methods:

- once after activation
- repeatedly at specific intervals related to a CAN ID

Destroy Single CAN Frame

The *Destroy Single Frame* area refers to the next CAN frame that is recognized after activation.


1. Enter the *Bit Position* where in the CAN frame the error is to be generated. The bit position must start after the identifier. The count includes the stuff bits.
2. Execute the destroy action with *Do it*.

The next received or transmitted CAN frame will be destroyed at the selected bit position.

Destroy Multiple CAN Frames

1. Enter the *CAN ID* of the CAN frame that is intended to be destroyed multiple times. The following specifications refer to this ID.
2. Enter the *Bit Position* where in the CAN frame the error is to be generated. The bit position must start after the identifier. The count includes the stuff bits.
3. If CAN messages are to be sent unharmed before being destroyed, specify the *Number of Frames to ignore*.
4. Determine the *Number of Frames to destroy*.
5. Confirm the entries with *Apply* to activate the error generator.
6. Stop destroying further CAN frames with *Disable*.

6 API PCAN-Basic

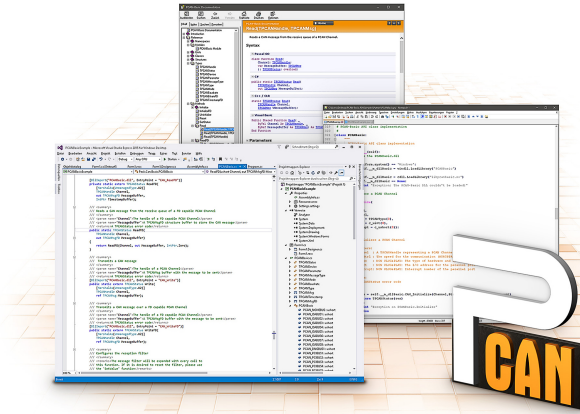

The intended use of PCAN-Basic requires compliance with the license rights. Read the license agreement for end users at:

<https://www.peak-system.com/quick/eula>

The programming interface (API) PCAN-Basic provides basic functions for the connection of own programs to the CAN and CAN FD Interfaces of PEAK-System. PCAN-Basic is the interface between the program and the device driver. In Windows operating systems this is a DLL (Dynamic Link Library) and in Linux operating systems an SO (Dynamic Shared Object). PCAN-Basic is designed to be cross-operating system compatible. Software projects can be ported between supported systems with little effort.

With the installation of the device driver package under Windows the DLL files of the API PCAN-Basic are placed in the system folder. Examples for all common programming languages as well as libraries and help files are available as a download package at: www.peak-system.com/quick/DL-Develop-E

For Linux, a download of the API is available under this link. For a use of PCAN-Basic another driver package with a chardev driver is needed, because an access under SocketCAN is not possible. The "Driver Package for Proprietary Purposes", the user manual, and further information about the implementation can be found at www.peak-system.com/linux.

6.1 Features of PCAN-Basic

- API for developing applications with CAN and CAN FD connections
- Support for CAN specifications 2.0 A/B and FD
- Application development for the platforms Windows 11 (x64/ARM64), 10 (x64), and Linux
- Multiple PEAK-System applications and your own can be operated on a physical channel at the same time
- Use of a single DLL for all supported hardware types
- Use of up to 16 channels for each hardware type (depending on the PEAK CAN interface used)
- Simple switching between channels of a PEAK CAN interface
- Access to the CAN channels of a PCAN-Gateway via the new PCAN-LAN hardware type
- Driver-internal buffering of up to 32,768 CAN messages per CAN channel
- Precision of time stamps on received messages up to 1 μ s (depending on the PEAK CAN interface used)
- Supports PEAK-System's trace formats version 1.1 and 2.0 (for CAN FD applications)
- Access to specific hardware parameters, such as listen-only mode
- Notification of the application through Windows® events when a message is received
- Support of CAN error frames
- Confirmation of physical transmission by CAN echo frames
- Extended system for debugging operations
- Multilingual debugging output
- Output language depends on operating system
- Debugging information can be defined individually
- Thread-safe API

6.2 Principle Description of the API

The sequence of accessing the CAN interface is divided into three phases:

Initialization

A CAN channel must be initialized before using it. This is done by the simple call of the function `CAN_Initialize` for CAN and `CAN_InitializeFD` for CAN FD. Depending on the type of the CAN hardware, up to 16 CAN channels can be opened at the same time. After a successful initialization the CAN channel is ready. No further configuration steps are required.

Interaction

For receiving and transmitting messages the functions `CAN_Read` and `CAN_Write` as well as `CAN_ReadFD` and `CAN_WriteFD` are available depending on the initialization mode. Additional settings can be made, such as setting up message filters to confine to specific CAN IDs or setting the CAN controller to Listen-only mode.

When receiving CAN messages, events are used for an automatic notification of an application (client). This offers the following advantages:

- The application no longer needs to check for received messages periodically (no polling).
- The response time at reception is reduced.

Completion

To end the communication the function `CAN_Uninitialize` is called in order to release the reserved resources for the CAN channel, among others. In addition the CAN channel is marked as "Free" and is available to other applications.

7 Technical Data

Connectors (PCAN-USB X6 with D-Sub Connectors)

CAN	6 x D-Sub male panel connector, 9-pin, pin assignment according to CiA® 106
USB Upstream	USB plug type A; High-speed USB 2.0 (compatible with USB 1.1 and USB 3.0)
USB Downstream	USB female panel connectors type A; High-speed USB 2.0 (compatible with USB 1.1 and USB 3.0); max. 500 mA current output
Power	Phoenix mating connector, 2-pole, pitch 3.81 mm (Phoenix Contact MC1,5/2-STF-3.81 – 1827703)

Connectors (PCAN-USB X6 with M12 Connectors)

CAN	6 x M12 (m) male panel connectors, 5 pins, pin assignment according to CiA® 106, Manufacturer: Phoenix, Type: SACC-DSI-MS-5CON-M12-SCO SH, Connection distance requires 18 mm connector housings
USB Upstream	USB port type Mini-B, High-Speed-USB 2.0 (compatible with USB 1.1 and USB 3.0)
Power	Phoenix M12 female panel connectors, 4-pole, a-coded

CAN

Protocols	CAN and CAN FD according to ISO 11898-1; non-ISO CAN FD	
Physical transmission	ISO 11898-2 (High-speed CAN)	
Transceiver	NXP TJA1044GT	
CAN bit rates	Nominal:	25 kbit/s up to 1 Mbit/s
CAN-FD bit rates	Nominal:	25 kbit/s up to 1 Mbit/s
	Data:	25 kbit/s up to 12 Mbit/s
Controller	FPGA implementation	
Time stamp resolution	1 µs	
Galvanic isolation (IPEH-004063/-64 only)	up to 300 V, separate for each CAN connector	
Internal Termination	via solder bridges, disabled at delivery	

Power supply

Supply voltage	8 to 30 V DC	
Power consumption without USB device on the USB downstream	Power: USB upstream:	max. 350 mA at 12 V DC 0 mA

Measures

Size (W x L x H)	with D-Sub connectors:	170 x 93 x 65 mm (without cable)
	with M12 connectors:	170 x 103 x 65 mm
USB upstream cable length	with D-Sub connectors:	1.5 m
	with M12 connectors:	2 m
Power supply cable length (IPEH-004063 only)	5 m	
Weight (without cable)	550 g	

Environment

Operating temperature	-40 to +85 °C (-40 to +185 °F)
Temperature for storage and transport	-40 to +100 °C (-40 to +212 °F)
Relative humidity	15 to 90 %, not condensing
Ingress protection (IEC 60529)	IP20 for IPEH-004062 and IPEH-004064 IP64 for IPEH-004063

Conformity

RoHS	EU Directive 2011/65/EU (RoHS 2) + 2015/863/EU DIN EN IEC 63000:2019-05
EMC	EU Directive 2014/30/EU DIN EN 55032:2022-08 DIN EN 55035:2018-04

Appendix A CE Certificate

EU Declaration of Conformity



This declaration applies to the following product:

Product name: **PCAN-USB X6**
Item number(s): **IPEH-004062, IPEH-004063, IPEH-004064**
Manufacturer: **PEAK-System Technik GmbH**
Otto-Röhm-Straße 69
64293 Darmstadt
Germany



We declare under our sole responsibility that the mentioned product is in conformity with the following directives and the affiliated harmonized standards:

EU Directive 2011/65/EU (RoHS 2) + 2015/863/EU (amended list of restricted substances)

DIN EN IEC 63000:2019-05

Technical documentation for the assessment of electrical and electronic products with respect to the restriction of hazardous substances (IEC 63000:2016);
German version of EN IEC 63000:2018

EU Directive 2014/30/EU (Electromagnetic Compatibility)

DIN EN 55032:2022-08

Electromagnetic compatibility of multimedia equipment - Emission requirements (CISPR 32:2015);
German version of EN 55032:2015 + AC:2016 + A11:2020 + A1:2020

DIN EN 55035:2018-04

Electromagnetic compatibility of multimedia equipment - Immunity requirements (CISPR 35:2016, modified);
German version of EN 55035:2017

Darmstadt, 30 August 2023

A handwritten signature in black ink, appearing to read "Uwe Wilhelm".

Uwe Wilhelm, Managing Director

Appendix B UKCA Certificate

UK Declaration of Conformity



This declaration applies to the following product:

Product name: **PCAN-USB X6**

Item number(s): **IPEH-004062, IPEH-004063, IPEH-004064**

Manufacturer:

PEAK-System Technik GmbH
Otto-Röhm-Straße 69
64293 Darmstadt
Germany

UK authorized representative:

Control Technologies UK Ltd
Unit 1, Stoke Mill,
Mill Road, Sharnbrook,
Bedfordshire, MK44 1NN, UK



We declare under our sole responsibility that the mentioned product is in conformity with the following UK legislations and the affiliated harmonized standards:

The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012

DIN EN IEC 63000:2019-05

Technical documentation for the assessment of electrical and electronic products with respect to the restriction of hazardous substances (IEC 63000:2016);
German version of EN IEC 63000:2018

Electromagnetic Compatibility Regulations 2016

DIN EN 55032:2022-08

Electromagnetic compatibility of multimedia equipment - Emission requirements (CISPR 32:2015);
German version of EN 55032:2015 + AC:2016 + A11:2020 + A1:2020

DIN EN 55035:2018-04

Electromagnetic compatibility of multimedia equipment - Immunity requirements (CISPR 35:2016, modified);
German version of EN 55035:2017


Darmstadt, 30 August 2023

A handwritten signature in black ink, appearing to read "Uwe Wilhelm".


Uwe Wilhelm, Managing Director

Appendix C Dimension Drawings

PCAN-USB X6 with D-Sub Connectors

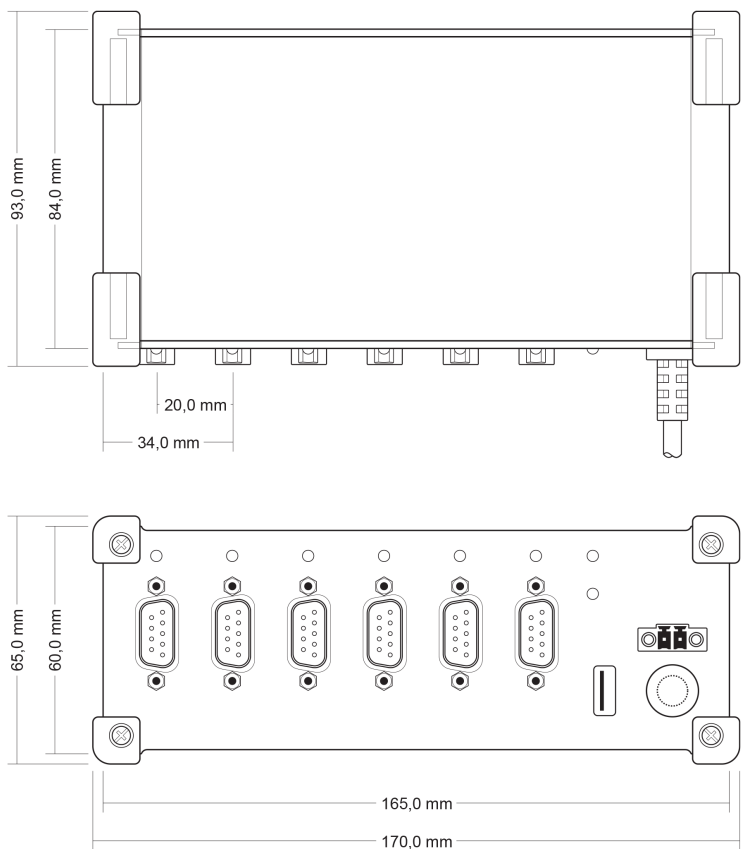

PCAN-USB X6 with M12 Connectors

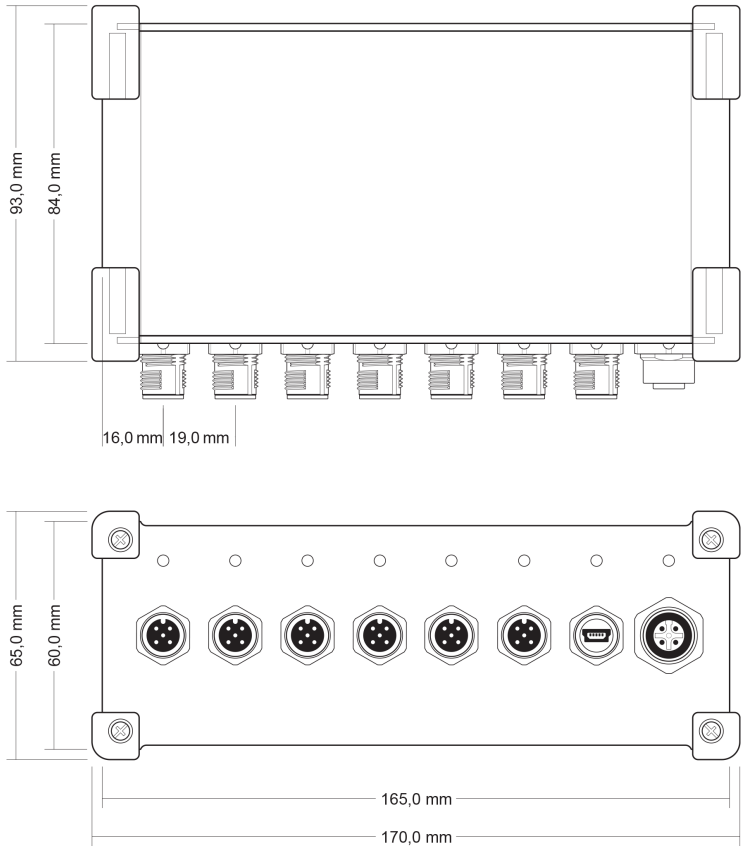

Appendix D Quick Reference



Note: The scope of supply does not contain a power supply unit for the device. There is no supply via the USB connection to the PC.

Software/Hardware Installation under Windows

Download the device drivers installation package from our website www.peak-system.com/quick/DL-Driver-E. Install the driver before you install the CAN interface.



Attention! Do not use a USB extension cable to connect the PCAN-USB X6 to the computer.

After that, you connect the PCAN-USB X6 to a power supply and to a USB port of the computer. Windows detects the new hardware and initializes the driver. The CAN LEDs of the adapter light green now.

Accessories (scope of delivery)	PCAN-USB X6 M12 connector	PCAN-USB X6 D-Sub
Power supply		
USB upstream		Direct connection

Getting Started under Windows

Run the CAN monitor PCAN-View from the Windows Start menu as a sample application for accessing the CAN interface. For initialization of the CAN interface select the desired CAN channel and CAN bit rate.

LEDs

Status CAN channels	Meaning
Green on	There's a connection to a driver of the operating system.
Green slow blinking	A software application is connected to the CAN channel.
Green quick blinking	Data is transmitted via the connected CAN bus.
Red blinking	An error is occurring during the transmission of CAN data.
Orange quick blinking	Identification of a channel by the PCAN-View software.

Status USB upstream	Meaning
Green on	A power supply and a connection via the USB upstream exist. The device is ready for use.
Orange on	There is only a connection via the USB upstream. The device is not ready for use.



Note: The status LED of the USB upstream is only lit, when it is connected to a USB 2.0 port or higher.

Appendix E Linux

Depending on the Kernel version, device drivers for the CAN interfaces from PEAK-System are already included in the operating system. The PCAN interfaces are handled as network devices (SocketCAN, netdev). You can find the documentation for SocketCAN under:

<https://www.kernel.org/doc/Documentation/networking/can.txt>

The following command lists the available drivers:

```
grep PEAK_ /boot/config-`uname -r`
```

Whether the required driver for the PCAN interface is present and loaded can be checked with the following command:

```
lsmod | grep ^peak check
```

If the initialization was successful, the response line starts with `peak_usb`.

You can find a recent list of which PCAN interface is supported from which kernel version onwards on our Linux website.

If the required drivers are not listed, install the "Driver Package for Proprietary Purposes". The download and documentation for the driver can also be found on: www.peak-system.com/linux

This driver package is also needed to use the APIs based on the chardev driver, for example PCAN-Basic, libpcan, or libpcanfd.

Appendix F Disposal

The product must not be disposed of in household waste. Dispose of the product properly in accordance with local regulations.